


CRBF...A/AT Crossed Roller Bearing - Mounting holed type, Integrated Inner/Outer ring, with separators(52 ~165mm OD)

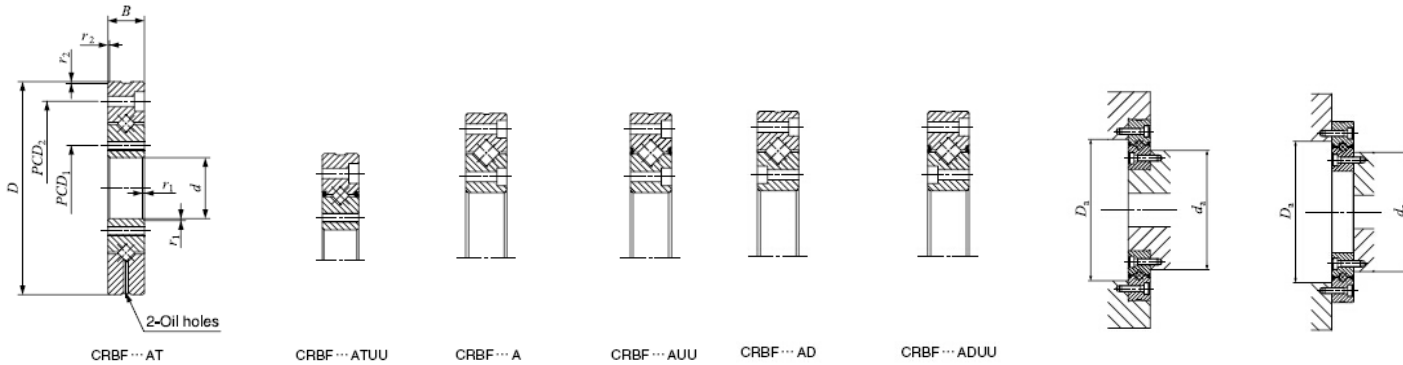

*** Outer ring has an oil groove and two oil holes**
*** Working Temperature -20°C ~ +80°C**

Part No.		Dimension (mm)					Mounting Holes(mm)				Load Rating (kN)		Mass
Open Type	Sealed Type	d	D	B	rsmn	PCD1	Specification	PCD2	Specification	Cr	Cor	kg	
CRBF 108 AT	CRBF 108 AT UU	10	52	8	0.3	16	4-M3 through	42	6-φ3.4 drilled through, φ6.5 counter bore depth 3.3	2.91	2.43	0.12	
CRBF 2012 AT	CRBF 2012AT UU	20	70	12	0.3	28	6-M3 through	57	6-φ3.4 drilled through, φ6.5 counter bore depth 3.3	7.6	8.37	0.31	
CRBF 2512 AT	CRBF 2512 AT UU	25	80	12	0.6	35	6-M3 through	67	6-φ3.4 drilled through, φ6.5 counter bore depth 3.3	8.61	10.6	0.4	
CRBF 3515 AT	CRBF 3515 AT UU	35	95	15	0.6	45	8-M4 through	83	8-φ4.5 drilled through, Φ8 counter bore depth 4.4	17.3	20.9	0.66	
CRBF 5515 AT	CRBF 5515 AT UU	55	120	15	0.6	65	8-M5 through	105	8-φ5.5 drilled through, Φ9.5 counter bore depth 5.4	20.1	27.7	0.96	
CRBF 8022 AT	CRBF 8022 AT UU	80	165	22	0.6	97	10-M5 through	148	10-φ5.5 drilled through, Φ9.5 counter bore depth 5.4	51.1	72	2.63	
CRBF 8022 A	CRBF 8022 A UU	80	165	22	0.6	97	10-φ5.5 drilled through, Φ9.5 counter bore depth 5.4	148		51.1	72	2.6	
CRBF 8022 AD	CRBF 8022 AD UU	80	165	22	0.6	97		148		51.1	72	2.6	